


Space-saving, Subminiature Dip Switch Offers Both Sealed and Unsealed Construction

- Completely sealed units allow immersion-cleaning without taping
- Designed to standards of DIL-IC; top actuated types are auto insertable
- Bifurcated movable contacts
- Subminiature size to save space by reducing the volume to 41% and mounting surface to 67% of conventional type
- Smooth, sure switching action

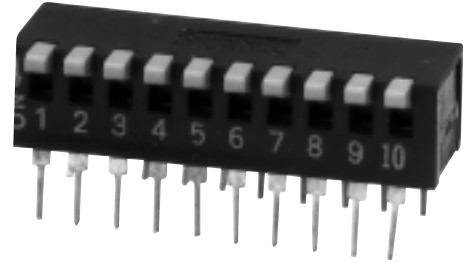

Ordering Information

Type	No. of pins	Part Number		
		Top actuated	Raised actuator	Side actuated
Sealed	2	A6D-2100	A6D-2103	A6DR-2100
	4	A6D-4100	A6D-4103	A6DR-4100
	6	A6D-6100	A6D-6103	A6DR-6100
	8	A6D-8100	A6D-8103	A6DR-8100
	10	A6D-0100	A6D-0103	A6DR-0100
Unsealed	4	A6D-4101	–	–
	6	A6D-6101	–	–
	8	A6D-8101	–	–

Characteristics

Switching capacity		100 mA, 5 VDC; 30 mA, 30 VDC
Permissible load		10 μ A, 3.5 VDC min.
Carry current		100 mA max.
Contact resistance		100 M Ω max.
Insulation resistance		100 M Ω min. (at 250 VDC)
Dielectric strength		500 VAC for 1 minute
Operating force		A6D: 500 g max., A6DR: 500 g max.
Vibration	Malfunction durability	10 to 55 Hz, 1.5 mm double amplitude
Shock	Malfunction durability	Approx. 300 m/s ² (30 G)
Materials	Base/Cover	PBT (Polybutylene terephthalate)
	Actuator	PPT (Polyphenylene terephthalate)
	Internal seal	Acryl nitril butadiene rubber
	Movable contact	Beryllium copper
	Terminal	42-alloy plate (nickel-iron alloy)
Ambient temperature	Operating	-20° to 70°C
Humidity		35% to 90% RH
Service life	Mechanical	5,000 operations min.
	Electrical	2,000 operations min.
Weight	A6D (Top actuated)	2-pin: 0.25 g, 3-pin: 0.35 g, 4-pin: 0.45 g, 5-pin: 0.55 g, 6-pin: 0.65 g, 7-pin: 0.75 g, 8-pin: 0.80 g, 9-pin: 0.90 g, 10-pin: 1.0 g
	A6DR (Side actuated)	2-pin: 0.4 g, 4-pin: 0.8 g, 6-pin: 1.2 g, 8-pin: 1.7 g, 10-pin: 2.2 g

Note: Data shown are of initial value.

OMRON

OMRON ELECTRONICS, INC.

One East Commerce Drive
Schaumburg, IL 60173
1-800-55-OMRON

OMRON CANADA, INC.

885 Milner Avenue
Scarborough, Ontario M1B 5V8
416-286-6465