Open Type Trimmer

Model 35



Features:

- 3 mm
- Open frame surface mount
- Cermet
- RoHS compliant



Model Styles Available

Top Adjust 35W

Electrical

Resistance Range	100 to 1,000,000 Ohms
Standard Resistance Tolerance	± 25%
Input Voltage, Maximum	50 V
Power rating, Watts	0.1 @ 70°C
End Resistance, Maximum	>1000 Ohms: 20 Ohms Max; > 1000 Ohms: 2% Max.
Actual Electrical Travel	220° ±20°
Mechanical Travel (35E)	280° ±20°
Insulation Resistance, Minimum	100 Megohms
Resolution	Essentially infinite
Contact Resistance Variation	5% Max.
Temperature Coefficient of Resistance	±250 ppm/°C

Mechanical

Torque, Maximum (35W, 35C)	2.8 in. oz.
Torque, Maximum (35E)	1.4 in. oz.
Weight, Approx.	0.01 oz.
Wiper Position	Approx. 50%


Open Type Trimmer

Model 35




Environmental Operating Temperature Range -40°C to +125°C Rotational Life, 20 Cycles ±15% ΔR Load Life, 0.1W, 1000 Hours, 70°C ±5% ΔR Resistance to Solder Heat 260°C for 10 sec. Aqueous cleaning not recommended

Ordering Information

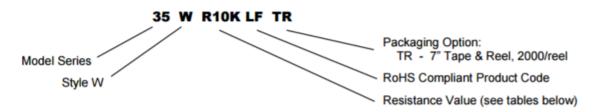

Packaging Information

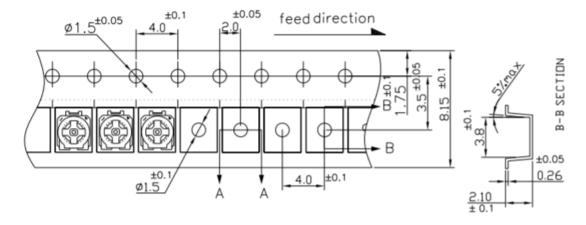


Open Type Trimmer

Model 35



Outline Drawings

Model 35W (Top Adjust)

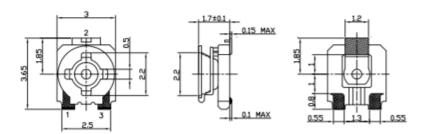



Recommended land pattern

Circuit Diagram

Standard Resistance Values, Ohms

Resistance (ohms)	
100	
200	
500	
1K	
2K	
5K	
10K	
20K	
50K	
100K	
200K	
500K	
1MEG	