

1

2

3

4

5




6

7

A

NOTES:


1. Insulation: Glass Filled PBT, UL94V-0, Color Black
2. Contact : Brass
3. Current Rating: 3A Max
4. Dielectric Voltage: 1000V rms / 1 minute
5. Insulation Resistance: 1000M ohm Min.
6. Contact Resistance: 30m ohm Max.
7. Operating and Storage Temperature: -40°C ~ +105°C
8. Mating Cycles: 10 Min.

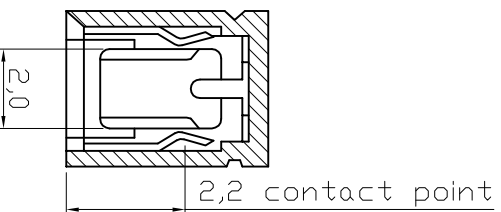

AKSG-200/x

Contact Area Plating: ③
 G: Gold Flash
 Z: Tinned

D



D

E

E

F

F

G

G

ROHS compliant
 Unit:mm

Scale	Free								
TOLERANCE									
.X	±0.38				Drawn	08.03.2005	Hellwig		
.XX	±0.25				Approved	07.06.2013	Winnie		
.XXX	±0.13	③	Update						
DIM	TOL	②	Update			27.07.2009	Rate		
X. °	±1°	①	Drawn			08.03.2005	Hellwig		
Angle	TOL								
UNIT	mm	Id.	Modification						

Customer-No.

ASSMANN WSW-No.

AKSG-200/X

Drawing-No.

ASS 0243 CO

rev03

Replace

ASSMANN
 WSW/ components

SHEET

1

2

3

4

5

6

7

H

H