

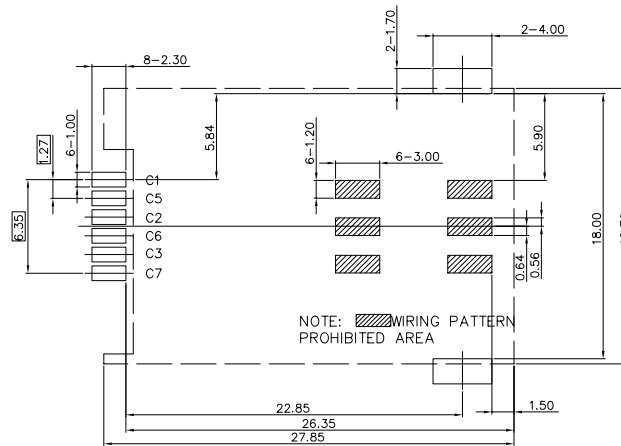
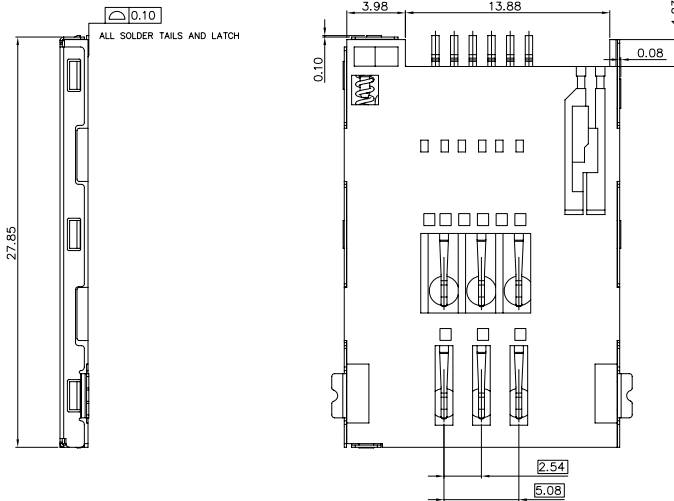
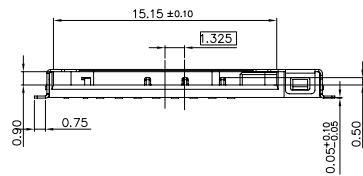
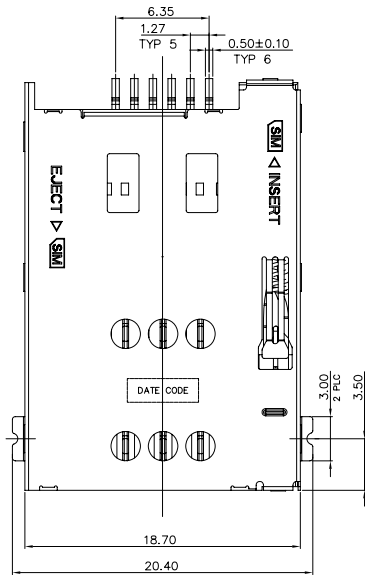


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		A版追従	03/20/07
B		修改圖面與實物相對	04/04/07
C	ES.00704.095	取消 LOGO 標示	04/14/07



SIM pin assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved



NOTES:

1.SPECIFICATIONS


INSULATION RESISTANCE: 500M min.AT DC 500V DC
 WITHSTANDING VOLTAGE: 250V ACrms FOR 1 MINUTE
 CONTACT RESISTANCE: 100MΩmax. AT 10MA/20mV max
 CURRENT RATING: 0.5A
 VOLTAGE RATING: 5.0 vrms
 OPERATING TEMP.RANGE: -55°C+85°C
 MATING CYCLES: 5000 INSERTIONS

2.MATERIAL:

INSULATOR: H-TEMPERATURE PLASTIC,UL 94V-0,
 COLOR"BLACK
 TERMINAL: COPPER ALLOY,T=0.15mm
 SWITCH: COPPER ALLOY,T=0.10mm
 SHELL: STAINLESS STEEL,T=0.15mm

3.FINISH:

TERMINAL: 50u" min NICKEL UNDERPLATED ON ALLOVER,GOLD 15u"
 ON CONTACT ARER, 80u"min TIN ON SOLDER TAIL.
 SHELL: 50u" NICKEL UNDERPLATED ON ALLOVER, GOLD FLASH ON SOLDER LATCH

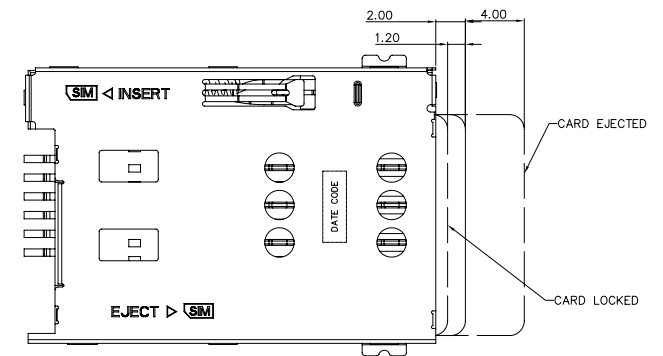

RECOMMENDED PCB LAYOUT

GENERAL	TOLERANCE	FILE.NO.	101-00269	PART.NO.	101-00269- 82	DRAWN	COCO	MATERIAL	SCALE	N/A	
X.±0.50	x. °± 5°	REV.	C	TITLE	SIM CARD READER 6PIN (PUSH/PUSH)W/O SWITCH	CHECKED		DATE	04/14/2007	UNIT	MM
.X±0.38	.x °± 2°	SIZE	A4	SHEET	1/1	APPROVED		Amphenol Shouh Min Industry			
.XX±0.25	.xx ± 1°										